

# Residential Unit mod. Flow Plus



Deep Hygiene



Silent



Safe



Eco Friendly



Practical



Versatile

# Residential unit mod. Flow Plus.

**Number of Users:** 1

**Work area:** 50-300 m<sup>2</sup>

**Socket points with iFlex line:** Up to 2 with a 12-meter flexible hose.

**Socket points with traditional line:** Up to 10 with a 7-meter flexible hose.

**Installation in embedded box:** No.

**Installation in outdoor box:** Yes.

**Contact System:** For wired system activation and shutdown. The unit starts when an electrical contact is established at the vacuum inlet.

**Noise reduction:** Integrated silencer, patented system for noise suppression of the air expelled from the unit.

**Dust container release:** Patented system for easy hooking and unhooking of the container with handle and front button. Also allows installation adjacent to walls.

**Filter release:** Quick-release system via a filter locking ring.

**Double motor protection system:** Automatic shutdown of the unit in case of clogged through an "Adaptive Sensing" device; thermal sensor in the electrical motor.



General D'Aspirazione  
Since 1974 pioneers in the Italian market  
in centralized vacuum cleaning sector.

## Residential unit mod. Flow Plus.

**Number of Users:** 1

**Work area:** 50-300 m<sup>2</sup>

**Motor:** Mono-stage Through-Flow motor

**Soft Start:** "Soft start" system of the motor to eliminate the power surge during startup.

**Self-locking system:** Frontal fixing on a dedicated wall bracket, and release by pressing two lateral tabs. This unique features allows installation even in restricted spaces.

**Reversible aspiration and exhaust:** The inlet and outlet can be positioned on the right or left side of the unit, or crossed, depending on customer needs.

**Installation:** Suitable for both indoor and outdoor installation, protected from direct rain. Manufactured from high-quality ABS, they don't suffer the oxidation process common to all metallic products.



# Residential unit mod. Flow Plus.

**Number of Users:** 1

**Work area:** 50-300 m<sup>2</sup>

**Internal Filter Protection:** Filter protection device against direct impact from solid particles, also facilitating the cyclonic motion of the vacuum unit.

*Included in the Package:*

- 1 Wall bracket with 4 plugs and screws
- 2 Flexible hose to join the pipes to the unit
- 4 Metal hose clamps
- 1 Spare bag



## Technical information.


Technical Data		Flow Plus
Number Users		1
Work Area	m <sup>2</sup>	50-300
Max. number of iFlex sockets	n	2
Max. number of traditional sockets	n	10
Farthest outlet distance	m	30
Integrated wireless		NO
Integrated silencer		YES
Touch interface + App		NO
Dimensions		
Dust container capacity	l	18
Diameter	cm	30
Filtering surface	m <sup>2</sup>	0,85
Ø Inlet/outlet	mm	50
Height	cm	94
Width	cm	37
Weight	kg	9,2
Technical performance data at 230V		
Maximum airflow	m <sup>3</sup> /h	187
Vacuum pressure	mmH <sub>2</sub> O	2.890
Maximum noise level*	dB A	61
Aspiration power	Airwatt	566
Electrical technical data		
Motor power	W	1250
Power supply	V	220-240
Power supply frequency	Hz	50-60
Current draw	A	5,9
Motor thermal protection		SI
Auto shut-off protection	SENSING	NO
Delayed fuse	A	8
Sockets supply	Vdc	5
Electrical insulation	Classe II	<input type="checkbox"/>

\* Noise level measured according to UNI EN ISO 3744 standard

General D'Aspirazione  
Since 1974 pioneers in the Italian market  
in centralized vacuum cleaning sector




## Installation measures.

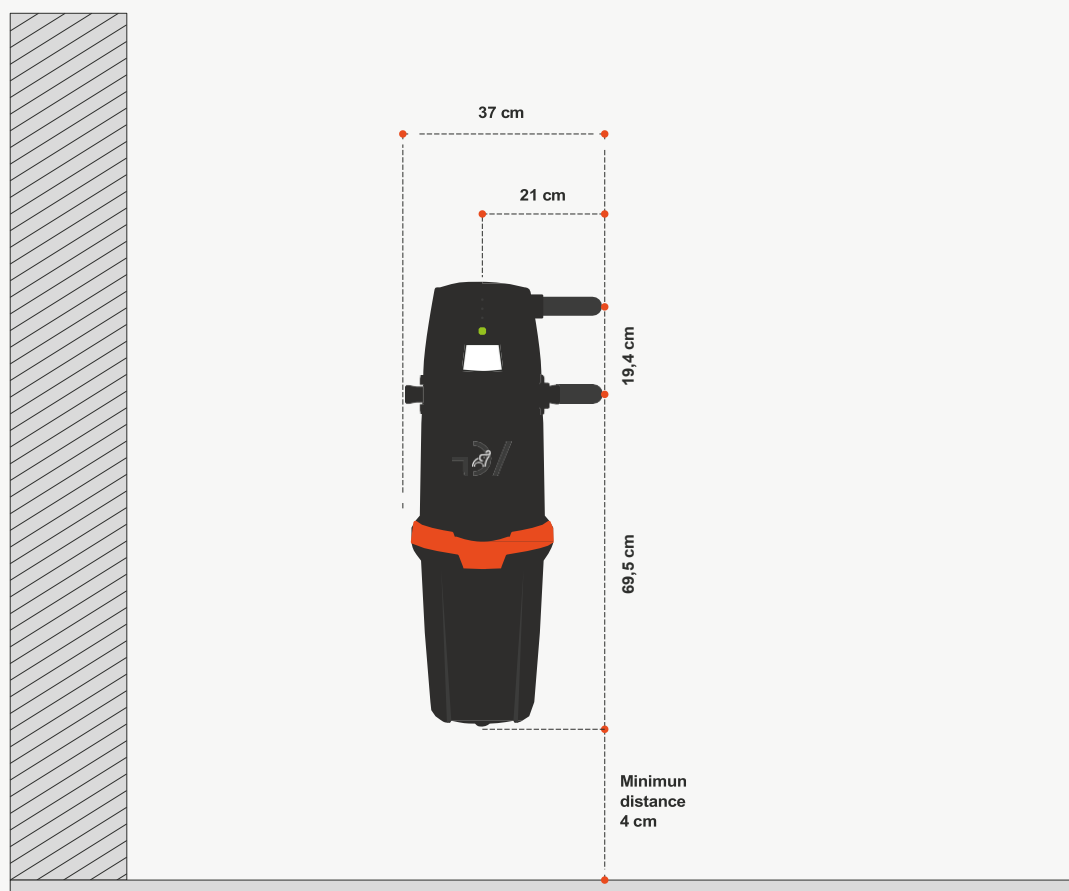

General D'Aspirazione

Since 1974 pioneers in the Italian market  
in centralized vacuum cleaning sector

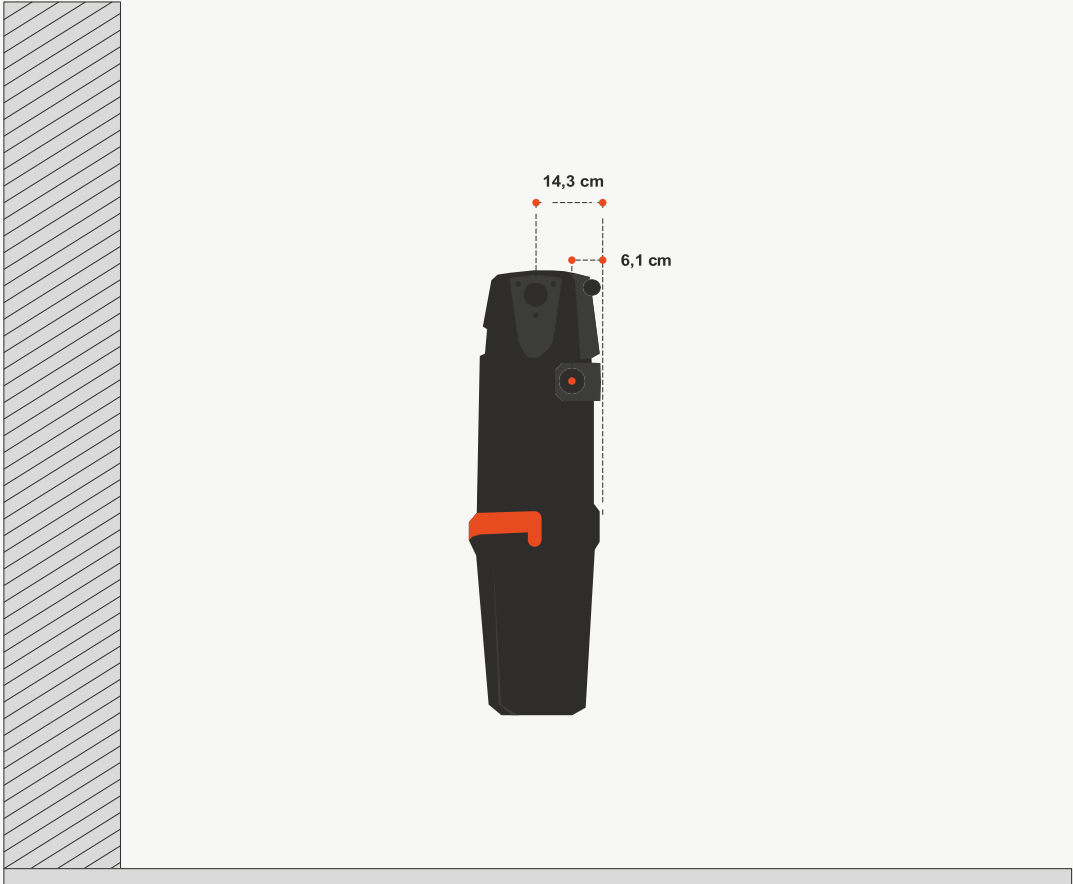




General D'Aspirazione  
Since 1974 pioneers in the Italian market  
in centralized vacuum cleaning sector.

## Support.

If you need help, contact your dealer who will provide you with the correct assistance.

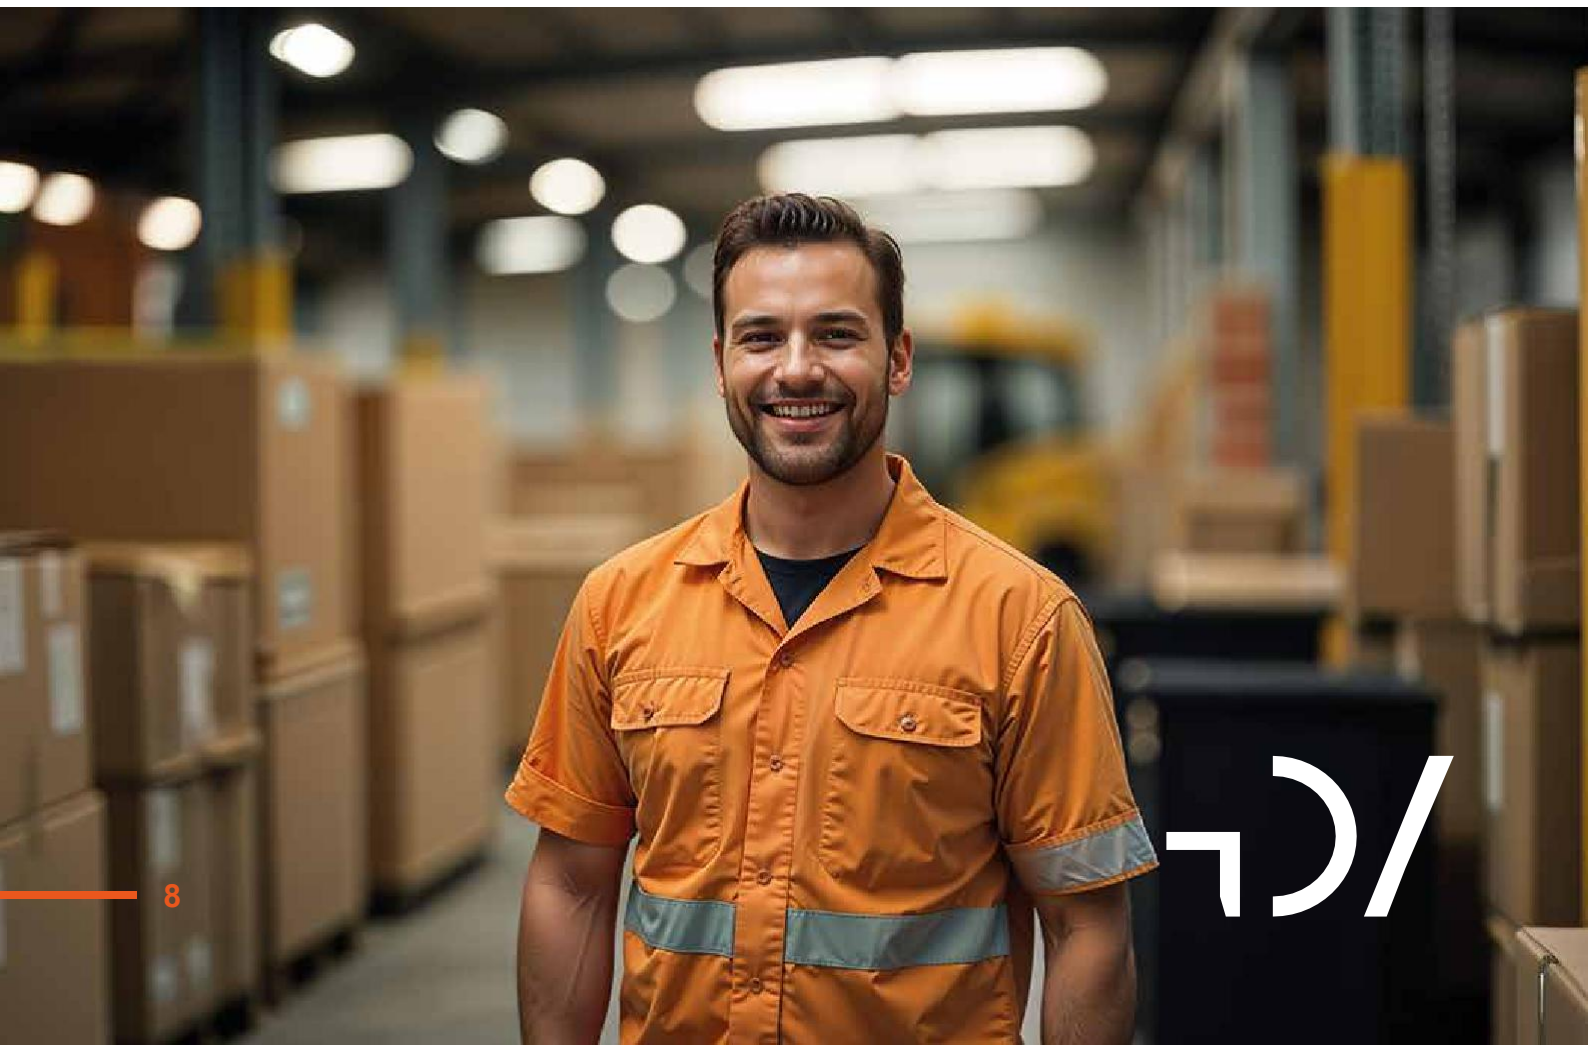



OLK/



**General D'Aspirazione s.a.s.**

generaldaspirazione.com  
+ 39 0541 931012

Del Lavoro street, 9/11 - San Mauro Pascoli - 47030 (FC) Italy